


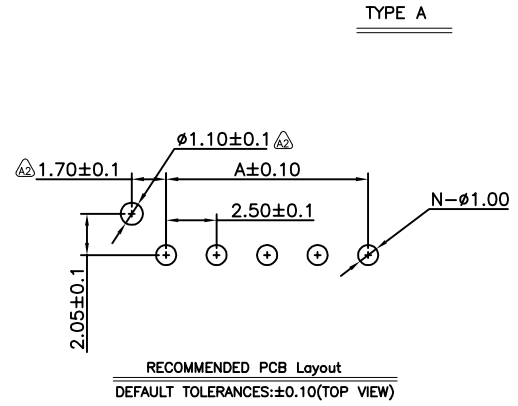
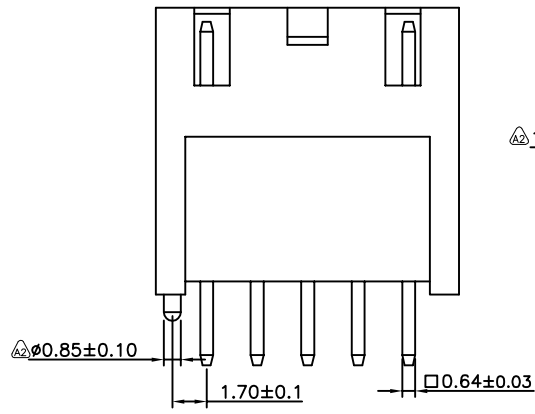

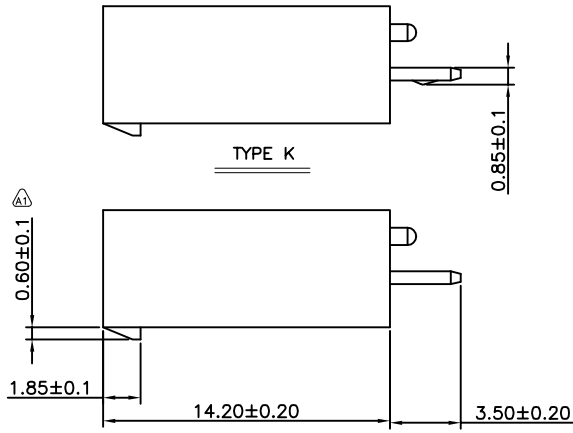


正式图 参考图 设变图

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN
A1	ECN NO.	5P去掉2边挂钩/增加挂钩高度/2P增加开槽尺寸	2021.09.25	韩敏
A2	ECN NO.	定位点由1.0±0.1改成0.85±0.10	2021.10.09	韩敏

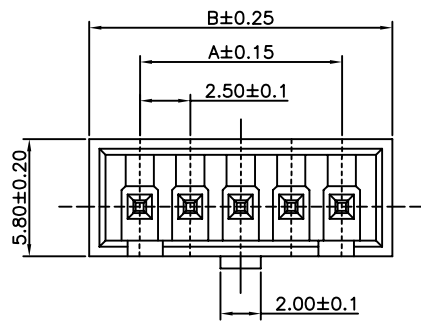

NOTE:  
 1.Current Rating: 3A  
 2.Rated voltage: 250V AC\DC  
 3.Dielectric Withstanding Voltage: AC 500V/1minute  
 4.Contact resistance: ≤30mΩ  
 5.Insulation resistance: ≥500MΩ  
 6.Temperature range: -25°C to +85°C  
 7.Terminal retention force: ≥20N

Ordering information:  
 XH2508X-XXP-SZXX-XX XX X  
 (1) (2) (3) (4) (5) (6)

(1):Model:  
 0=TYPE A K=TYPE K  
 (2):NO OF PIN :02P ~ 16P  
 (3):Terminal plating:  
 AC=Bright Tin  
 (4):Housing material  
 PA=PA66 UL94V-0  
 (5):Housing Colour:  
 23=Off White 01=Red 03=Yellow  
 04=Green BK=Black  
 (6):Packing mode:  
 1=in bags

PIN数	No. of Dimensions	
	A	B
02	2.50	7.50
03	5.00	10.00
04	7.50	12.50
05	10.00	15.00
06	12.50	17.50
07	15.00	20.00
08	17.50	22.50
09	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50

TOLERANCE	NAME(INTENDED USE) CUSTOMER DRAWING	ZHAOBO 浙江朝博电子有限公司 Zhejiang Zhaobo Electronic Co.,Ltd
X.X ±0.30 X.* ±10*	PART NO.	TITLE: 2.50mm Pitch 180°Wafer-DIP TYPE
.XX ±0.20 .X' ± 8'	See Ordering information	DRAWG NO. 01ZB-0043
.XXX ±0.10 .XX' ± 5'	DESIGN: HAN MIN	SCALE SHEET REV. 1:1 1/1 A2
UNITS mm	CHED: ZHU DE YIN	
MATERILA ----	APPD: NI HAI QING	
FINISH ----		

NO.	PART NAME	QTY.	MATERIAL	REMARK
2	TERMINAL	N	BRASS	See Ordering information
1	HOUSING	1	See Ordering information	See Ordering information