

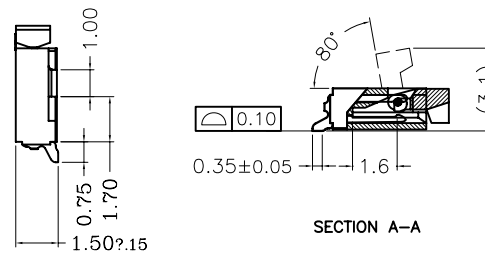
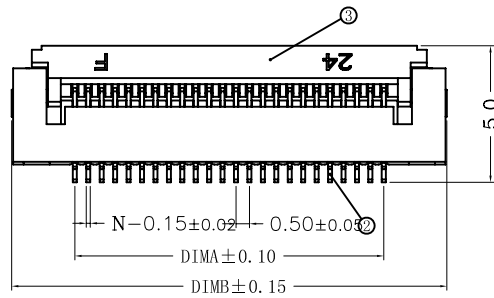

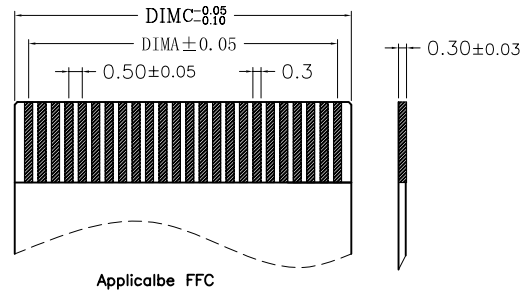


正式图 参考图 设变图


REV.	ECN NO.	DESCRIPTION	DATE	DESIGN
AO	---	INITIAL RELEASED	2017.03.08	HAN MIN

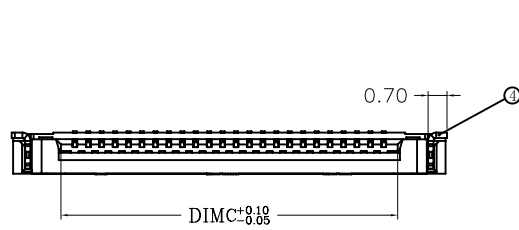

- NOTE:
- Current Rating: 0.5A
 - Rated voltage: 50V AC\DC
 - Dielectric Withstanding Voltage: AC 250V/1minute
 - Contact resistance: $\leq 30m\Omega$ Max
 - Insulation resistance: $\geq 500M\Omega$
 - Temperature range: $-25^{\circ}C$ to $+85^{\circ}C$

- See Ordering information:
 FP0513W-XXP-SSXX-LP00X
 (1) (2) (3)
- (1): NO OF PIN :04P ~ 60P
 (2): Terminal plating:
 AD=Foggy Tin AE=Gold(G/F)
 A5=Semi gold Tin
 (3): Packing mode:
 3=Tube 4=Tape & Reel

PIN	DIMA	DIMB	DIMC	PIN	DIMA	DIMB	DIMC
4	1.50	6.20	2.53	33	16.00	20.70	17.03
5	2.00	6.70	3.03	34	16.50	21.20	17.53
6	2.50	7.20	3.53	35	17.00	21.70	18.03
7	3.00	7.70	4.03	36	17.50	22.20	18.53
8	3.50	8.20	4.53	37	18.00	22.70	19.03
9	4.00	8.70	5.03	38	18.50	23.20	19.53
10	4.50	9.20	5.53	39	19.00	23.70	20.03
11	5.00	9.70	6.03	40	19.50	24.20	20.53
12	5.50	10.20	6.53	41	20.00	24.70	21.03
13	6.00	10.70	7.03	42	20.50	25.20	21.53
14	6.50	11.20	7.53	43	21.00	25.70	22.03
15	7.00	11.70	8.03	44	21.50	26.20	22.53
16	7.50	12.20	8.53	45	22.00	26.70	23.03
17	8.00	12.70	9.03	46	22.50	27.20	23.53
18	8.50	13.20	9.53	47	23.00	27.70	24.03
19	9.00	13.70	10.03	48	23.50	28.20	24.53
20	9.50	14.20	10.53	49	24.00	28.70	25.03
21	10.00	14.70	11.03	50	24.50	29.20	25.53
22	10.50	15.20	11.53	51	25.00	29.70	26.03
23	11.00	15.70	12.03	52	25.50	30.20	26.53
24	11.50	16.20	12.53	53	26.00	30.70	27.03
25	12.00	16.70	13.03	54	26.50	31.20	27.53
26	12.50	17.20	13.53	55	27.00	31.70	28.03
27	13.00	17.70	14.03	56	27.50	32.20	28.53
28	13.50	18.20	14.53	57	28.00	32.70	29.03
29	14.00	18.70	15.03	58	28.50	33.20	29.53
30	14.50	19.20	15.53	59	29.00	33.70	30.03
31	15.00	19.70	16.03	60	29.50	34.20	30.53
32	15.50	20.20	16.53				

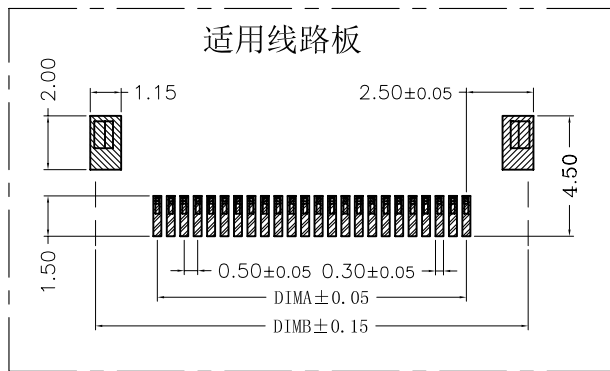

RECOMMENDED PCB Layout
 DEFAULT TOLERANCES: ±0.05(TOP VIEW)

NO.	PART NAME	QTY.	MATERIAL	REMARK
④	FITTING NAIL	2	Phosphor Bronze	Sn-plated
③	ACTUATOR	1	LCP UL94V-0	Black
②	TERMINAL	N	Phosphor Bronze	See Ordering information
①	HOUSING	1	LCP UL94V-0	Natural

TOLERANCE	NAME(INTENDED USE) CUSTOMER DRAWING	ZHAOBO 浙江朝博电子有限公司 Zhejiang Zhaobo Electronic Co.,Ltd		
X.X ±0.30	X.* ±10°	PART NO.	TITLE: 0.5 Pitch掀盖卧式下接(H=1.5)	
.XX ±0.20	.X* ± 8°	See Ordering information	DRAWG NO. 03FP-0006	
.XXX ±0.10	.XX* ± 5°	DESIGN: HAN MIN	SCALE SHEET REV. 1:1 1/1 AO	
UNITS mm		CHED: ZHU DE YIN		
MATERILA ----		APPD: NI HAI QING		
FINISH ----				