


正式图 参考图 设变图

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN
AO	---	INITIAL RELEASED	2017.03.08	HAN MIN

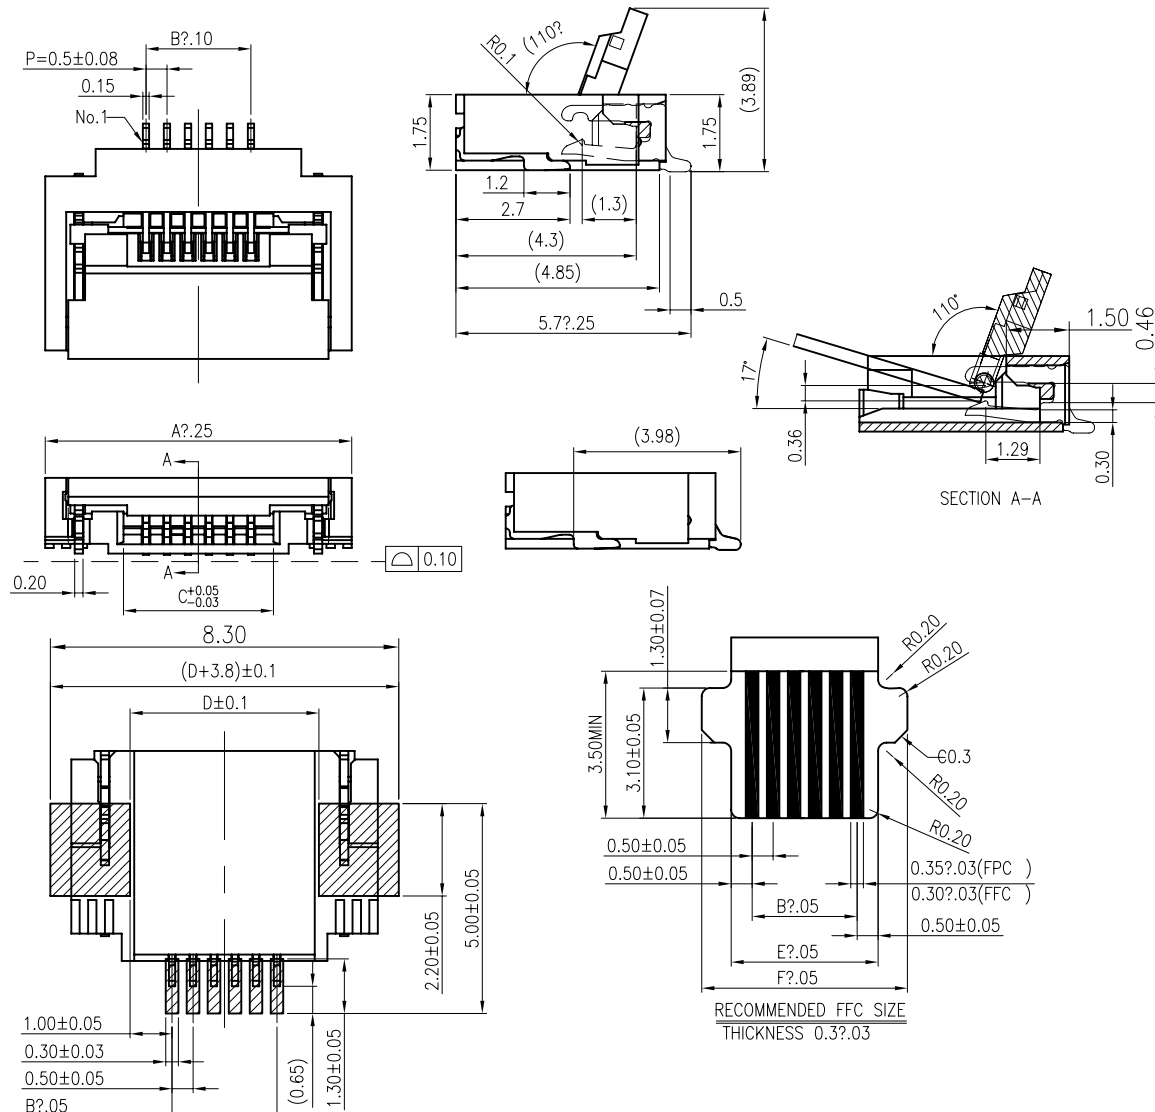

NOTE:
 1.Current Rating: 0.5A
 2.Rated voltage:50V AC\DC
 3.Dielectric Withstanding Voltage:
 AC 250V/1minute
 4.Contact resistance: $\leq 30\text{m}\Omega$
 5.Insulation resistance: $\geq 500\text{M}\Omega$
 6.Temperature range:
 -25°C to $+85^\circ\text{C}$

Ordering information:
 FP05140-XXP-SSXX-LP00X
 (1) (2) (3)
 (1):NO OF PIN :04P ~ 65P
 (2):Terminal plating:
 AD=Foggy Tin AE=Gold(G/F)
 (3):Packing mode:
 3=Tube 4=Tape & Reel

PIN	Dimensions						PIN	Dimensions					
	A	B	C	D	E	F		A	B	C	D	E	F
4	6.30	1.50	2.57	3.50	2.50	3.90	35	21.80	17.00	18.07	19.00	18.00	19.40
5	6.80	2.00	3.07	4.00	3.00	4.40	36	22.30	17.50	18.57	19.50	18.50	19.90
6	7.30	2.50	3.57	4.50	3.50	4.90	37	22.80	18.00	19.07	20.00	19.00	20.40
7	7.80	3.00	4.07	5.00	4.00	5.40	38	23.30	18.50	19.57	20.50	19.50	20.90
8	8.30	3.50	4.57	5.50	4.50	5.90	39	23.80	19.00	20.07	21.00	20.00	21.40
9	8.80	4.00	5.07	6.00	5.00	6.40	40	24.30	19.50	20.57	21.50	20.50	21.90
10	9.30	4.50	5.57	6.50	5.50	6.90	41	24.80	20.00	21.07	22.00	21.00	22.40
11	9.80	5.00	6.07	7.00	6.00	7.40	42	25.30	20.50	21.57	22.50	21.50	22.90
12	10.30	5.50	6.57	7.50	6.50	7.90	43	25.80	21.00	22.07	23.00	22.00	23.40
13	10.80	6.00	7.07	8.00	7.00	8.40	44	26.30	21.50	22.57	23.50	22.50	23.90
14	11.30	6.50	7.57	8.50	7.50	8.90	45	26.80	22.00	23.07	24.00	23.00	24.40
15	11.80	7.00	8.07	9.00	8.00	9.40	46	27.30	22.50	23.57	24.50	23.50	24.90
16	12.30	7.50	8.57	9.50	8.50	9.90	47	27.80	23.00	24.07	25.00	24.00	25.40
17	12.80	8.00	9.07	10.00	9.00	10.40	48	28.30	23.50	24.57	25.50	24.50	25.90
18	13.30	8.50	9.57	10.50	9.50	10.90	49	28.80	24.00	25.07	26.00	25.00	26.40
19	13.80	9.00	10.07	11.00	10.00	11.40	50	29.30	24.50	25.57	26.50	25.50	26.90
20	14.30	9.50	10.57	11.50	10.50	11.90	51	29.80	25.00	26.07	27.00	26.00	27.40
21	14.80	10.00	11.07	12.00	11.00	12.40	52	30.30	25.50	26.57	27.50	26.50	27.90
22	15.30	10.50	11.57	12.50	11.50	12.90	53	30.80	26.00	27.07	28.00	27.00	28.40
23	15.80	11.00	12.07	13.00	12.00	13.40	54	31.30	26.50	27.57	28.50	27.50	28.90
24	16.30	11.50	12.57	13.50	12.50	13.90	55	31.80	27.00	28.07	29.00	28.00	29.40
25	16.80	12.00	13.07	14.00	13.00	14.40	56	32.30	27.50	28.57	29.50	28.50	29.90
26	17.30	12.50	13.57	14.50	13.50	14.90	57	32.80	28.00	29.07	30.00	29.00	30.40
27	17.80	13.00	14.07	15.00	14.00	15.40	58	33.30	28.50	29.57	30.50	29.50	30.90
28	18.30	13.50	14.57	15.50	14.50	15.90	59	33.80	29.00	30.07	31.00	30.00	31.40
29	18.80	14.00	15.07	16.00	15.00	16.40	60	34.30	29.50	30.57	31.50	30.50	31.90
30	19.30	14.50	15.57	16.50	15.50	16.90	61	34.80	30.00	31.07	32.00	31.00	32.40
31	19.80	15.00	16.07	17.00	16.00	17.40	62	35.30	30.50	31.57	32.50	31.50	32.90
32	20.30	15.50	16.57	17.50	16.50	17.90	63	35.80	31.00	32.07	33.00	32.00	33.40
33	20.80	16.00	17.07	18.00	17.00	18.40	64	36.30	31.50	32.57	33.50	32.50	33.90
34	21.30	16.50	17.57	18.50	17.50	18.90	65	36.80	32.00	33.07	34.00	33.00	34.40

RECOMMENDED PCB PATTERN DIM.
 TOLERANCE : ± 0.05

TOLERANCE	NAME(INTENDED USE)	ZHAOBO 浙江朝博电子有限公司 Zhejiang Zhaobo Electronic Co.,Ltd
	CUSTOMER DRAWING	
X.X ± 0.30 X.* $\pm 10^\circ$	PART NO.	TITLE: 0.5 Pitch掀盖卧式下接(H=1.8)
.XX ± 0.20 .X.* $\pm 8^\circ$	See Ordering information	
.XXX ± 0.10 .XX.* $\pm 5^\circ$	DESIGN: HAN MIN	DRAWG NO. 03FP-0007
UNITS: mm	CHED: ZHU DE YIN	
MATERILA: ----	APPD: NI HAI QING	SCALE: 1:1
FINISH: ----		SHEET: 1/1
		REV.: AO

④	FITTING NAIL	2	Phosphor Bronze	Sn-plated
③	ACTUATOR	1	LCP UL94V-0	Black
②	TERMINAL	N	Phosphor Bronze	See Ordering information
①	HOUSING	1	LCP UL94V-0	Natural
NO.	PART NAME	QTY.	MATERIAL	REMARK