
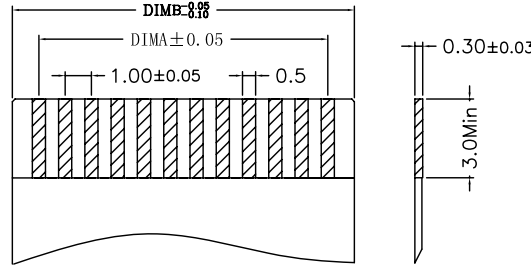
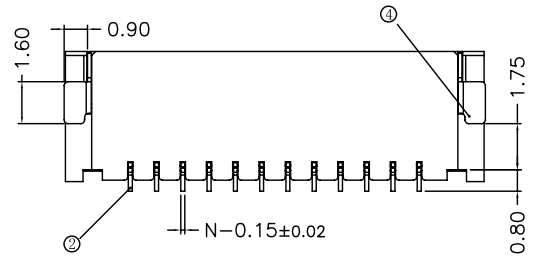


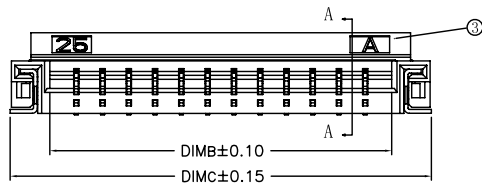
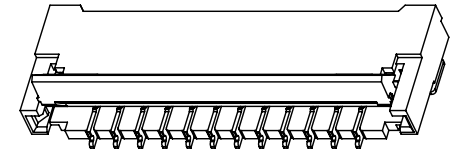



正式图	参考图	设变图
○		

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN
AO	---	INITIAL RELEASED	2017.03.08	HAN MIN

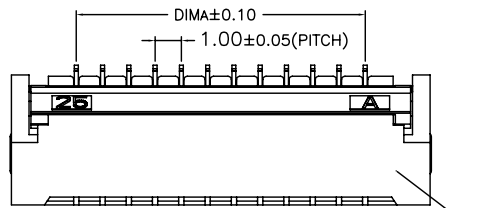

NOTE:  
 1.Current Rating: 0.5A  
 2.Rated voltage:50V AC\DC  
 3.Dielectric Withstanding Voltage:  
 AC 250V/1minute  
 4.Contact resistance: ≤30mΩ  
 5.Insulation resistance: ≥500MΩ  
 6.Temperature range:  
 -25°C to +85°C

Ordering information:  
 FP1015W-XXP-SSXX-LP00X  
 (1) (2) (3)

(1):NO OF PIN :04P ~ 30P

(2):Terminal plating:


AD=Foggy Tin AE=Gold(G/F)

A5=Semi gold Tin

(3):Packing mode:

3=Tube 4=Tape & Reel

PIN	DIMA	DIMB	DIMC
4	3.00	5.02	8.04
5	4.00	6.02	9.04
6	5.00	7.02	10.04
7	6.00	8.02	11.04
8	7.00	9.02	12.04
9	8.00	10.02	13.04
10	9.00	11.02	14.04
11	10.00	12.02	15.04
12	11.00	13.02	16.04
13	12.00	14.02	17.04
14	13.00	15.02	18.04
15	14.00	16.02	19.04
16	15.00	17.02	20.04
17	16.00	18.02	21.04
18	17.00	19.02	22.04
19	18.00	20.02	23.04
20	19.00	21.02	24.04
21	20.00	22.02	25.04
22	21.00	23.02	26.04
23	22.00	24.02	27.04
24	23.00	25.02	28.04
25	24.00	26.02	29.04
26	25.00	27.02	30.04
27	26.00	28.02	31.04
28	27.00	29.02	32.04
29	28.00	30.02	33.04
30	29.00	31.02	34.04

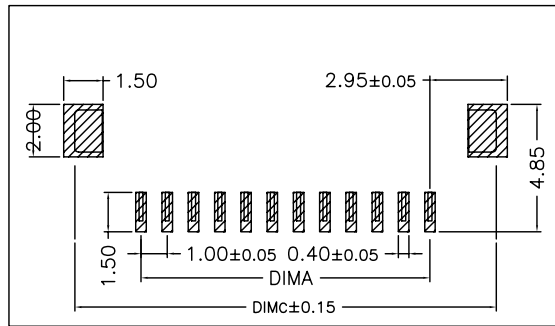

RECOMMENDED PCB Layout  
 DEFAULT TOLERANCES:±0.05(TOP VIEW)

NO.	PART NAME	QTY.	MATERIAL	REMARK
④	FITTING NAIL	2	Phosphor Bronze	Sn-plated
③	ACTUATOR	1	LCP UL94V-0	Black
②	TERMINAL	N	Phosphor Bronze	See Ordering information
①	HOUSING	1	LCP UL94V-0	Natural

TOLERANCE	NAME(INTENDED USE)	ZHAOBO 浙江朝博电子有限公司		
X.X ±0.30	X.* ±10°	ZheJiang Zhaobo Electronic Co.,Ltd		
.XX ±0.20	.X.* ± 8°	PART NO.	TITLE:	
.XXX ±0.10	.XX.* ± 5°	See Ordering information	1.0 Pitch后压卧式(H=2.0)	
UNITS	mm	DESIGN: HAN MIN	DRAWG NO.	
MATERILA	----	CHED: ZHU DE YIN	03FP-0018	
FINISH	----	APPD: NI HAI QING	SCALE	SHEET
			1:1	1/1
			REV.	AO