
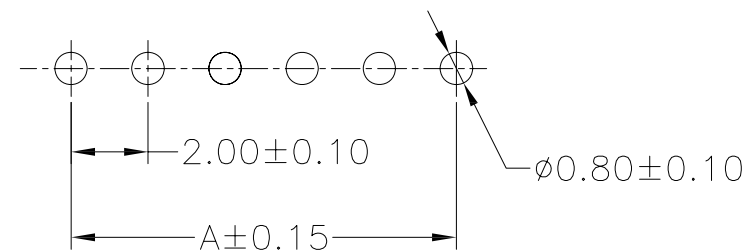
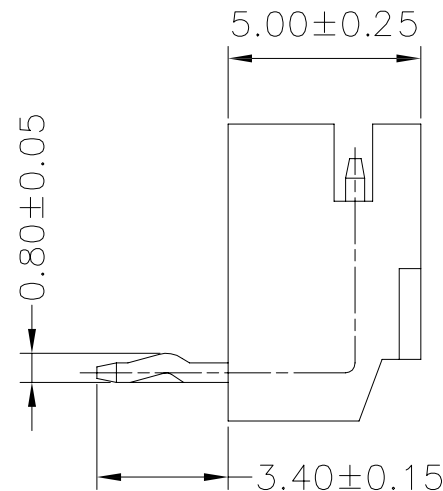



正式图 参考图 设变图

○

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN
A0	---	INITIAL RELEASED	2017.03.08	HAN MIN

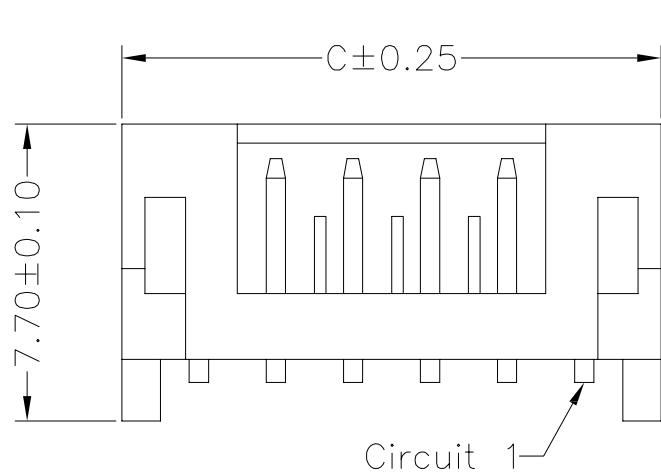

RECOMMENDED PCB Layout  
 DEFAULT TOLERANCES: ±0.10(TOP VIEW)

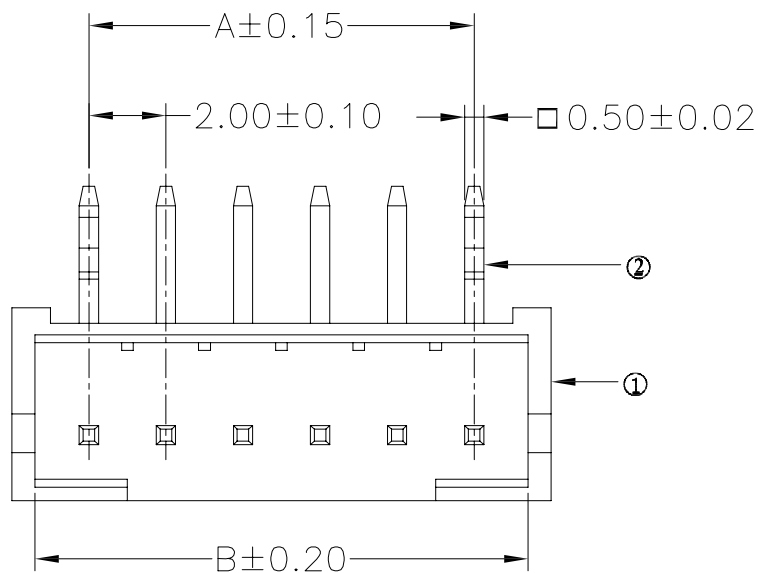

NOTE:

- 1.Current Rating: 2A
- 2.Rated voltage: 250V AC\DC
- 3.Dielectric Withstanding Voltage:  
AC 500V/1minute
- 4.Contact resistance:  $\leq 30m\Omega$
- 5.Insulation resistance:  $\geq 100M\Omega$
- 6.Temperature range:  
-25°C to +85°C

Ordering information:  
 PH20080-~~XX~~P-SW~~XX~~-~~XX~~00X  
 (1) (2) (3) (4)

- (1):NO OF PIN :02P ~ 15P
- (2):Terminal plating:  
AC=Bright Tin
- (3):Housing material  
PA=PA66 UL94V-0
- (4):Packing mode:  
1=in bags

No.of PIN数	Dimensions(mm)		
	A	B	C
02	2.00	4.80	6.00
03	4.00	6.80	8.00
04	6.00	8.80	10.00
05	8.00	10.80	12.00
06	10.00	12.80	14.00
07	12.00	14.80	16.00
08	14.00	16.80	18.00
09	16.00	18.80	20.00
10	18.00	20.80	22.00
11	20.00	22.80	24.00
12	22.00	24.80	26.00
13	24.00	26.80	28.00
14	26.00	28.80	30.00
15	28.00	30.80	32.00

TOLERANCE	NAME(INTENDED USE) CUSTOMER DRAWING	ZHAOBO 浙江朝博电子有限公司 ZheJiang Zhaobo Electronic Co.,Ltd		
X.X ±0.30	X.* ±10°	PART NO.	TITLE: 2.00mm Pitch 90°Wafer-DIP TYPE带保护	
.XX ±0.20	.X* ± 8°	See Ordering information	DRAWG NO. 01ZB-0038	
.XXX ±0.10	.XX* ± 5°	DESIGN: HAN MIN	SCALE 1:1	
UNITS mm		CHED: ZHU DE YIN	SHEET 1/1	REV. A0
MATERILA ----		APPD: NI HAI QING		
FINISH ----				

NO.	PART NAME	QTY.	MATERIAL	REMARK
2	TERMINAL	N	BRASS	See Ordering information
1	HOUSING	1	See Ordering information	White color